


Technical Bulletin

No: 113 – Wiring External Switches for RS Console Clock

You will need (3) Single Pole Single Throw normally open switches (spring-loaded pushbutton type) and (1) Single Pole Single Throw (toggle or slide), plus wire. Use twisted pair wire to minimize noise pickup.

- 1 Open console and remove clock assembly from overbridge. You may find it necessary to disconnect hinges and gently open console lid all the way.
- 2 Look on solder (display) side of the clock PC board and locate the solder points for switches S-1 through S-4
- 3 Attach wires from external switches as shown in drawing.
- 4 Re-mount clock.

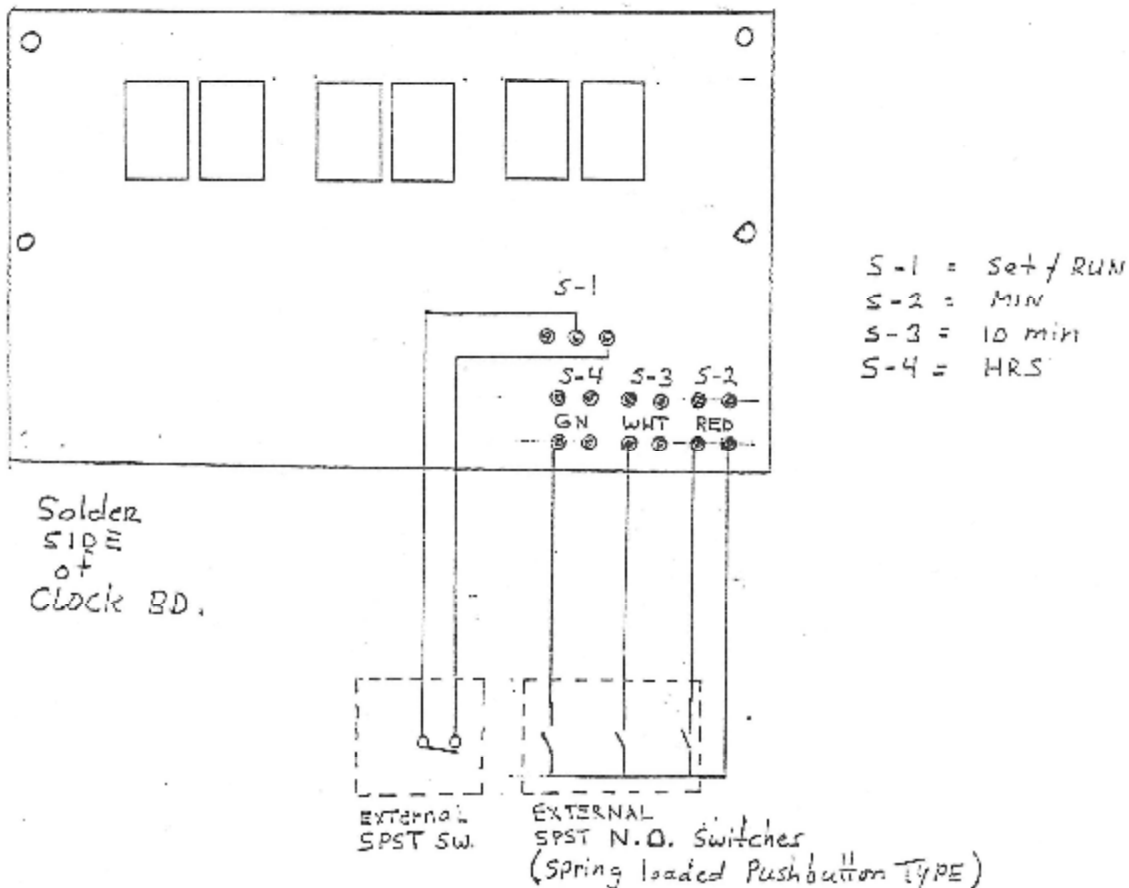

601 Heron Drive
Logan Township, NJ 08085
Phone: 856-467-8000 • Fax: 856-467-3044
<http://www.radiosystems.com>