


# Technical Bulletin

## No: 111 – Pan-Pot Addition Procedure

NOTE: This instruction sheet applies to one channel only. Perform the identical procedure for each addition channel to be modified

- Contents:
- 1 P/N 3107 Pot 10K Bournes w/ hardware
  - 1 P/N 2816 Resistor 10K 1/4W 1%
  - 2 P/N 9267 Resistor 13.7K 1/4W 1%
  - 4 P/N 8808 Resistor 6.98K 1/4W 1%
  - 2 P/N 9281 Resistor 48.7K 1/4W 1%
  - 1 P/N 6074 Connector 5 Pin Electrovert

- Procedure:
1. Drill/punch 3/8" dia. Hole near channel to be modified and mount pot.
- NOTE: use care to avoid dropping metal filings on PC Boards!
2. Wire pot as illustrated.
  3. Remove patch point shorting jumpers (J7 on 6 Channel Mixer Board)
  4. Replace R45, R47, R64, and R65 with 6.98K Ohm Resistors on 6 Channel Mixer Board
  5. Replace R44 and R62 with 48.7K Ohm Resistors on 6 Channel Mixer Board.

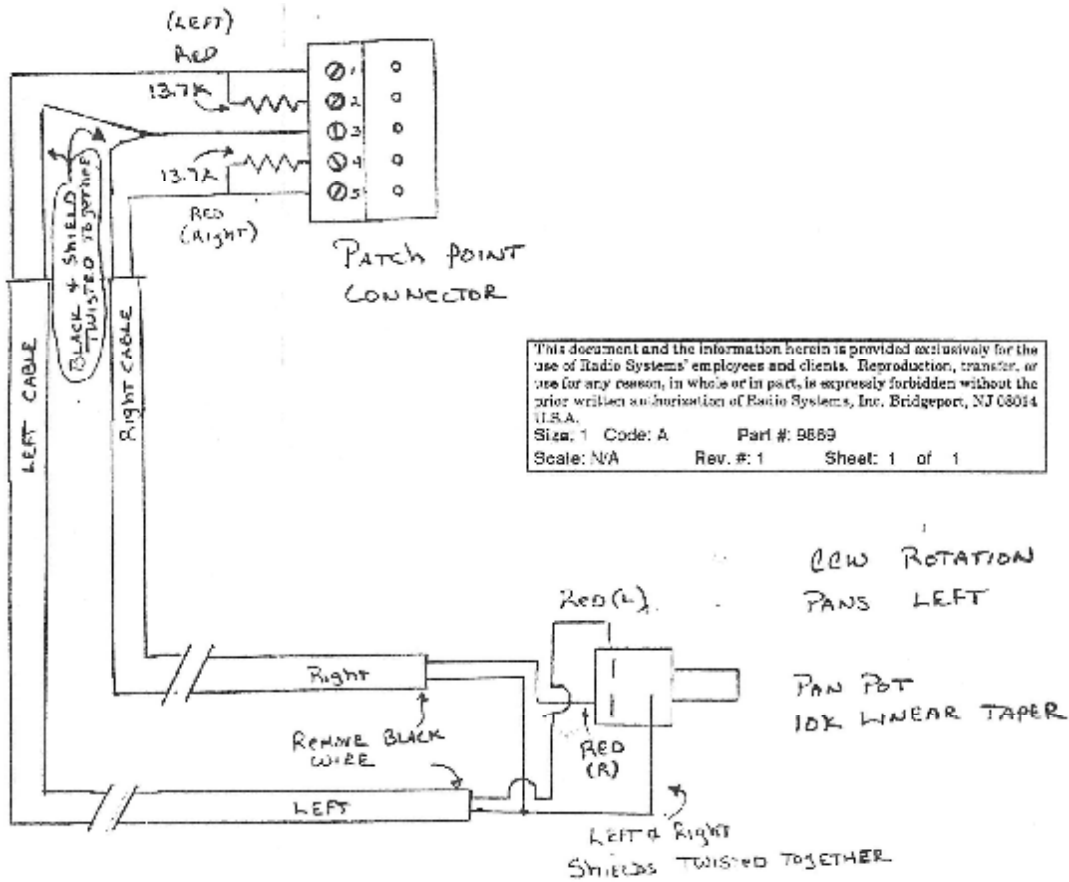

601 Heron Drive  
 Logan Township, NJ 08085  
 Phone: 856-467-8000 • Fax: 856-467-3044  
<http://www.radiosystems.com>