


For Assy:
10795
Rev: 1/26/2006

Radio Systems Part# 10795 Super Clock Keypad Operation

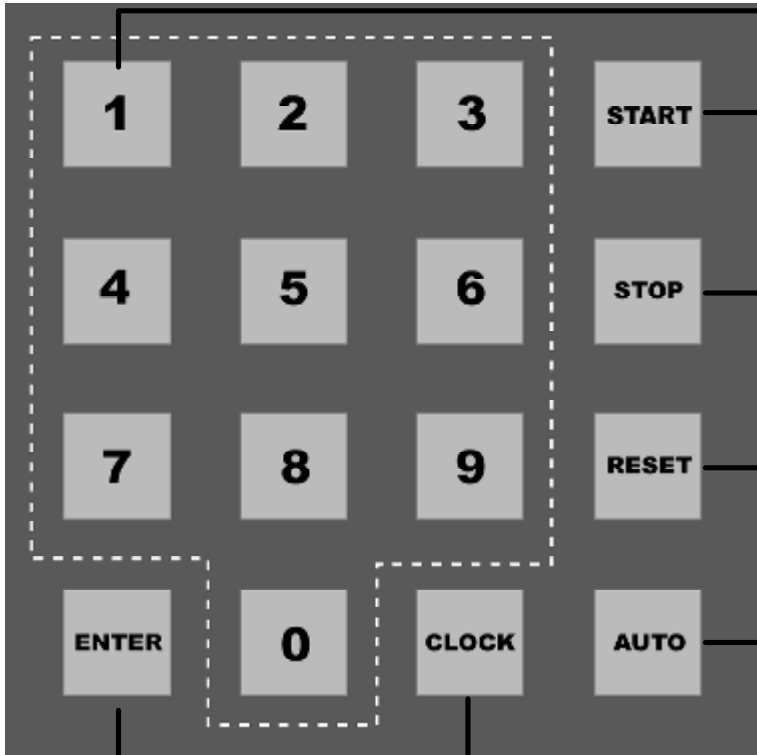

Key in any five digital up to 9:59:59. Do not enter tenths (they are preset to "0"). Invalid times (eg - 9:79:79) will not be accepted. Time is entered left-hand digit (hours) first, and will scroll across the display as entered. The front panel "down" lamp will illuminate.

Start down timing - Pressing start will initiate the down timing function. If an invalid time was entered (eg - 9:70:99), pressing the start button will clear the display.

Stop down timing - Pressing stop will cease the down timing function and hold the display.

Reset down time - Pressing the reset button once will return the display to the last entered down time and hold the display. The start button may now be pushed again to begin down timing. Pressing the reset button a second time will return the display to 0:00:00:0 and exit the down timing mode.

Auto start - Push the auto button to enable clock or timer start via a remote closure to pin 18 of the remote connector. The auto lamp will illuminate.

Set time of day (for units with clock displays only) - Press the clock button. The clock lamp will illuminate. Enter the time via the keypad in hours/minutes/seconds order. Press the start button to start the clock (invalid times such as 9:79:79 will be rejected). For an auto-start clock command, press the clock button again. The display will hold for an auto-start command and return the keypad timer functions.

Storing presets - Up to 10 down times may be stored in down time memory locations 0-9. Enter any valid down time up to 9:59:59. Press enter (the enter lamp will illuminate) followed by button 0-9 to select the desired memory location.

Recalling presets - Press enter (the recall lamp will illuminate) followed by button 0-9 to recall the desired time from memory. Press start to initiate down timing.

Information Grid	
Manufactured Date:	1995-1997
Status:	Obsolete
Application:	RS-Series Consoles
Notes:	



601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com