


For Assy:  
8679  
Rev: 1/26/2006

# Radio Systems Part# 8679

## RS Basic Remote Interface Board

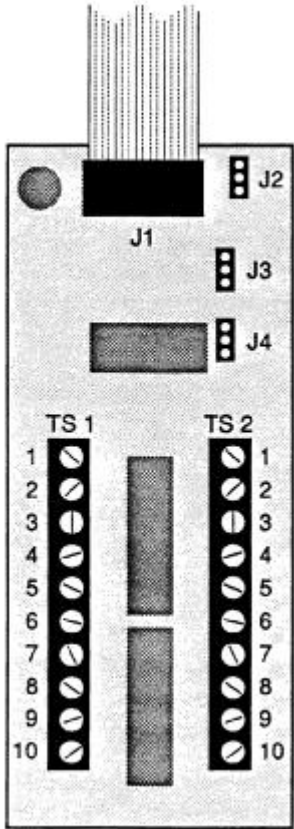

### Description

This optional card provides dry relay contacts for on and off control of machines which will not directly interface to open collector circuitry. Relays can be programmed for pulse or holding operation.

This card also "splays out" all channel status and control information from the input control card remote interface DIP connector for special user applications.

### Headers

- J1: DIP connector to input control card
- J2: Console Input assign
- J3: Console "Off" switch - holding/pulse assign
- J4: Console "On" switch - holding/pulse assign

### TS 1 Terminal Strip Connections

- 1. } Off Relay
- 2. } Contacts
- 3. Remote On Lamp
- 4. GND
- 5. Timer Reset
- 6. +15V
- 7. Input A Selected (GND)
- 8. PGM Selected (GND)
- 9. AUD Selected (GND)
- 10. Mono Selected (GND)

### TS 2 Terminal Strip Connections

- 1. } On Relay
- 2. } Contacts
- 3. Remote Off Lamp
- 4. Channel On - Status
- 5. Channel On - Control
- 6. Channel Off - Control
- 7. Input B Selected (GND)
- 8. Cough (or aux fader)/Auto Cue
- 9. Channel Off - Status
- 10. +7.5 V

### Programming

#### Input Assign (J2)

"A"  
Strapped



Input A Control

#### "Off" Relay Operation (J3)



Relay "Holds"

#### "On" Relay Operation (J4)



Relay "Pulses"

"B"  
Strapped



Input B Control



Relay "Pulses"



Relay "Holds"

Option Board Grid	
Manufactured Date:	1988-1998
Status:	Obsolete
Application:	RS-Series
Notes:	



601 Heron Drive · Logan Township, NJ 08085  
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com  
www.radiosystems.com · www.studiohub.com